

# Security Door SD-BD

Burglar resistance category 3, ENV 1627.



**MaxiDoor**

Stenfallsgatan 2, SE-718 32 Frövi  
Tel +46 581 377 80 Fax +46 581 377 89  
info@maxidoor.se www.maxidoor.se

**MaxiDoor**

# Burglar-proof, strong and durable

Single-leaf security door. Burglar resistance category 3 under ENV 1627.

## SD-BD

For use as a burglar-resistant door. Suitable as an outer door in storerooms and cellars where there is a high risk of break-in, and for shops, offices and industrial premises.


SD-BD is based on our welded fire door design. The door features 4 mm sheet steel break-in protection on the front, reinforced welded hinges, and internal reinforcement of both door and frame against break-in. Manufactured from cold-rolled sheet steel as standard or from hot-dip galvanized sheet steel to order.

This type of door allows a certain degree of flexibility and customization in respect of dimensions and features.

Bullet resistance: SD-BD can be supplied in a bullet-proof version, category FB4 under EN 1522, designated SD-FB4. This version of the door is reinforced with 4 mm sheet steel over its entire exterior. SD-FB4 provides protection against 357 Magnum, 44 Magnum and similar weapons.

### CERTIFICATION AND APPROVALS

- Burglar resistance category 3. The door is labelled with test results on delivery.
- MaxiDoor is ISO-certified in respect of quality assurance, environmental protection and the working environment.

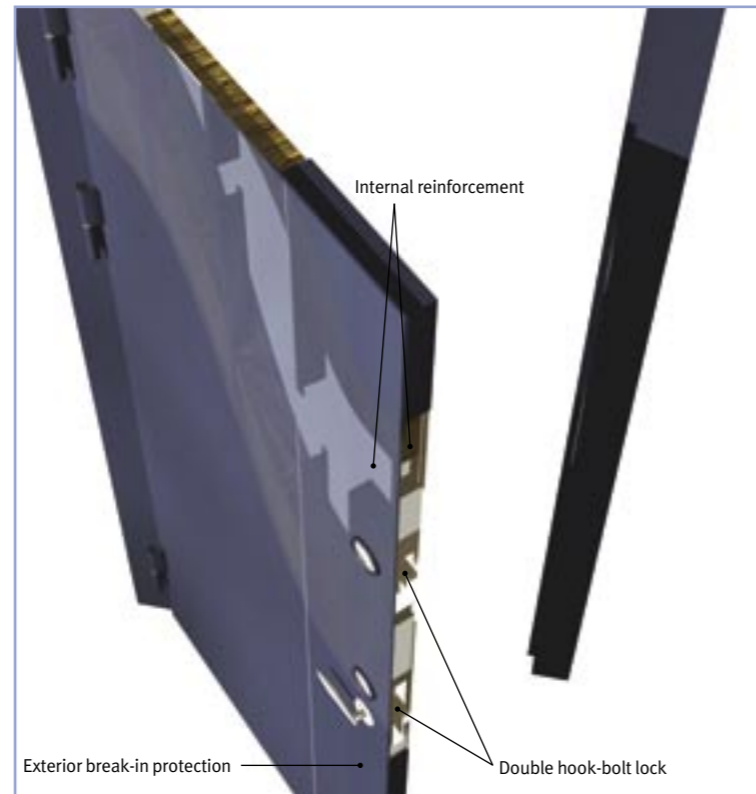

### DOOR LEAF

Rebated door in 1.25 mm sheet steel. Internal welded struts. Mineral wool insulation. Door thickness 54 mm. Externally, visible break-in protection on front. Internally, reinforced lock fixing and reinforced hinges.

### FRAME

Available in models B and C, both in 2.0 mm sheet steel. Double fixings with adjustable frame bolts. The frame is supplied ready-assembled, with welded corners, and insulated with mineral wool.

### FINISH

Powder-coated in the RAL colour of your choice, or painted in grey primer.


### FITTINGS

Welded hinges, securely pinned on back. Supplied with double hook-bolt lock made by ASSA.

*SS-ENV 1627 is the current Swedish Standard for burglar-resistant doors. Category 3 can withstand attempted break-ins by burglars equipped with tools such as chisels, pliers and crow-bars. For increased protection and apartment doors, see the brochure on our Security Door TR100, TR400, category 4.*

Module	Wall aperture +20, -5 mm	Frame aperture mm	Weight kg
09 x 21	900 x 2100	800 x 2030	95
10 x 21	1000 x 2100	900 x 2030	100
11 x 21	1100 x 2100	1000 x 2030	105
12 x 21	1200 x 2100	1100 x 2030	110

## DIAGRAMS OF SECURITY DOOR

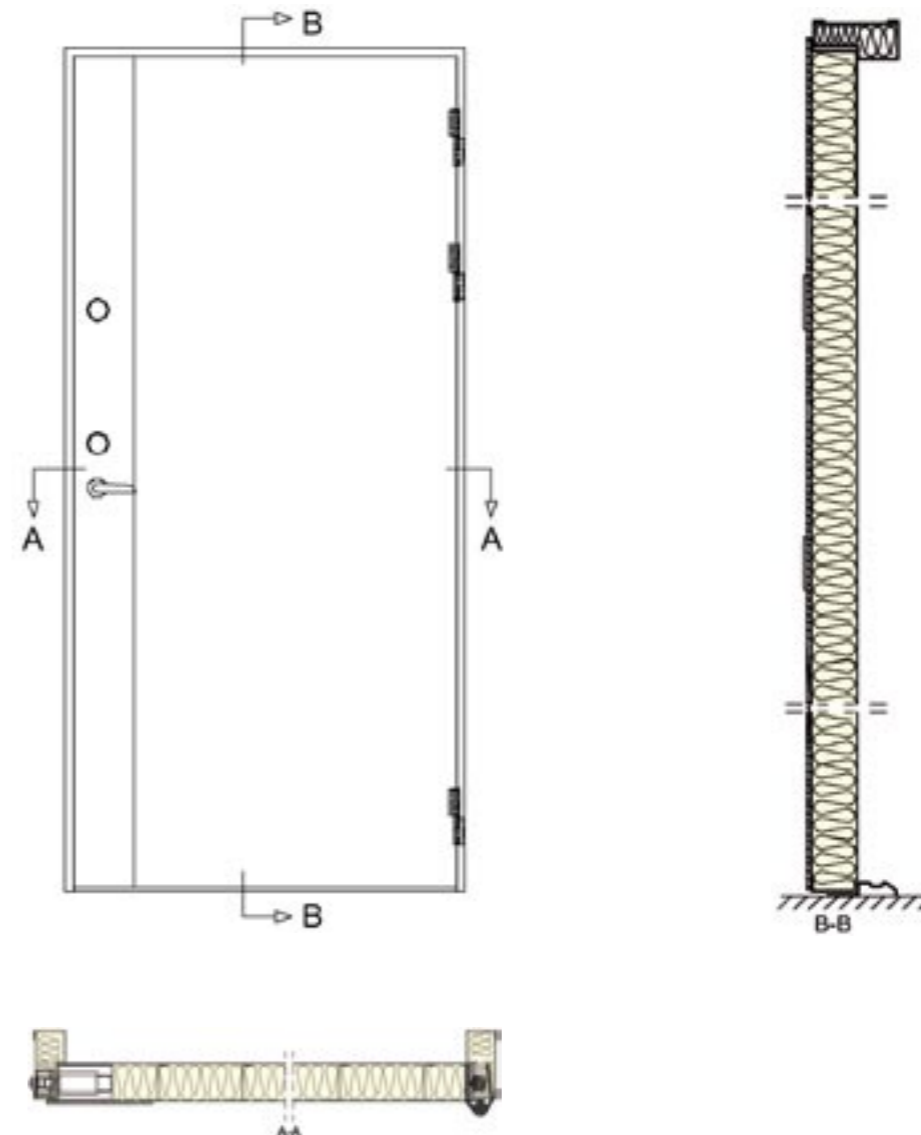

## FRAME TYPES

